


RIVETS

Shimai Blind Rivets

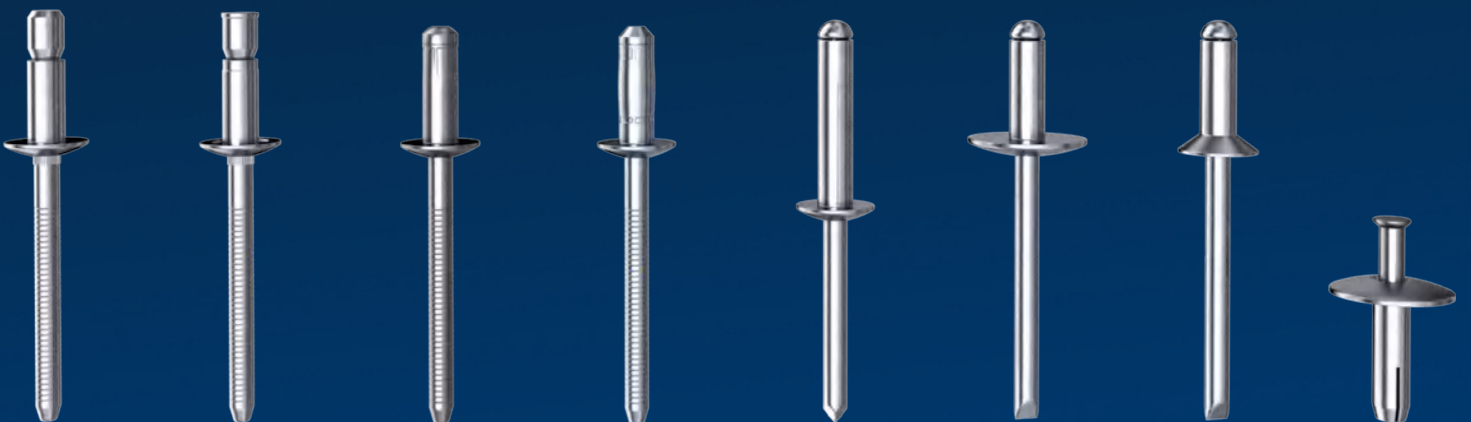

Index

Blind Rivet Overview	01
Open End Blind Rivets	02
Painted Rivets	03
Sealed Blind Rivet	04
Multi-Grip Blind Rivet	05
High Strength Blind Rivet	06
Anlock Blind Rivet In-Blot	08
Anlock Blind Rivet Out-Bolt	09
Bulb Tite Blind Rivet	10
Structural Bulb Tite Blind Rivet	11
Peel Blind Rivet	12
Drive Rivet	13
Packaging & Shipping	14
About Us	15

Blind Rivet Overview

Material



Aluminum alloy



Steel




Stainless steel




Copper

Head type


Dome Head

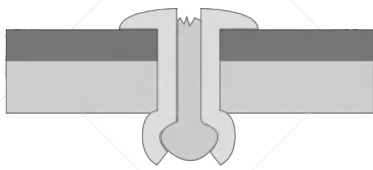

Large Flange Head

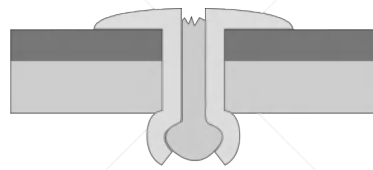

Countersunk Head

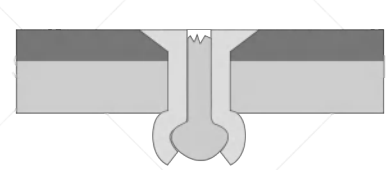

Finish


1. Polished: Mainly used on stainless steel.
2. Zinc Plated: Mainly used on steel.
3. Color painted:
All kind of RAL color are available on special request.

Standard


- DIN
- ISO
- Customized
- GB
- JIS

Length and diameter


Dome Head



Large Flange Head



Countersunk Head



Certification




CE Certificate | SGS Certificate | TUV Certificate

Open End Blind Rivet



Dome Head Large Flange CSK Head

Commonly used instructions

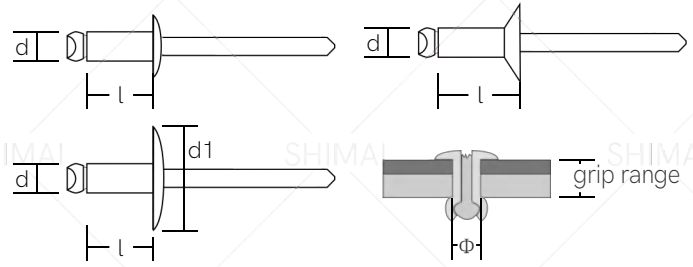

*d1: large flange is available by order

Material

- aluminum alloy (body) + steel (mandrel)
- aluminum alloy (body) + Stainless steel (mandrel)
- steel (body) + steel (mandrel)
- Stainless steel (body) + Stainless steel (mandrel)
- aluminum alloy (body) + aluminum alloy (mandrel)


Applications

- Office furniture
- Automotive
- Construction
- Building
- Leather production

Specification (mm/inch)


Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
2.4 (3/32)	6.4 (1/4)	2.5-4.0	2.5-2.6	4.0 (5/32)	19.0 (3/4)	11.5-14.0	4.1-4.2
2.4 (3/32)	8.0 (5/16)	4.0-5.5	2.5-2.6	4.0 (5/32)	22.0 (7/8)	14.0-17.0	4.1-4.2
2.4 (3/32)	10.0 (3/8)	5.5-7.5	2.5-2.6	4.8 (3/16)	8.0 (5/16)	1.5-3.5	4.9-5.0
3.2 (1/8)	6.4 (1/4)	1.0-3.0	3.3-3.4	4.8 (3/16)	10.0 (3/8)	3.5-5.5	4.9-5.0
3.2 (1/8)	8.0 (5/16)	3.0-5.0	3.3-3.4	4.8 (3/16)	11.4 (7/16)	5.5-7.0	4.9-5.0
3.2 (1/8)	10.0 (3/8)	5.0-6.5	3.3-3.4	4.8 (3/16)	12.7 (1/2)	7.0-8.0	4.9-5.0
3.2 (1/8)	11.4 (7/16)	6.5-8.0	3.3-3.4	4.8 (3/16)	14.5 (9/16)	8.0-9.5	4.9-5.0
3.2 (1/8)	12.7 (1/2)	8.0-9.0	3.3-3.4	4.8 (3/16)	16.0 (5/8)	9.5-11.0	4.9-5.0
3.2 (1/8)	14.5 (9/16)	9.0-10.5	3.3-3.4	4.8 (3/16)	19.0 (3/4)	11.0-14.0	4.9-5.0
3.2 (1/8)	16.0 (5/8)	10.5-12.0	3.3-3.4	4.8 (3/16)	22.0 (7/8)	14.0-17.0	4.9-5.0
3.2 (1/8)	19.0 (3/4)	12.0-14.5	3.3-3.4	4.8 (3/16)	25.4 (1)	17.0-20.0	4.9-5.0
3.2 (1/8)	22.0 (7/8)	14.5-17.5	3.3-3.4	6.4 (1/4)	10.0 (3/8)	2.5-4.5	6.5-6.6
4.0 (5/32)	6.4 (1/4)	1.0-2.5	4.1-4.2	6.4 (1/4)	12.7 (1/2)	6.0-7.0	6.5-6.6
4.0 (5/32)	8.0 (5/16)	2.5-4.0	4.1-4.2	6.4 (1/4)	14.5 (9/16)	7.0-8.5	6.5-6.6
4.0 (5/32)	10.0 (3/8)	4.0-6.0	4.1-4.2	6.4 (1/4)	16.0 (5/8)	9.0-10.5	6.5-6.6
4.0 (5/32)	11.4 (7/16)	6.0-7.5	4.1-4.2	6.4 (1/4)	19.0 (3/4)	10.5-13.5	6.5-6.6
4.0 (5/32)	12.7 (1/2)	7.5-8.5	4.1-4.2	6.4 (1/4)	22.0 (7/8)	13.5-16.5	6.5-6.6
4.0 (5/32)	14.5 (9/16)	8.5-10.0	4.1-4.2	6.4 (1/4)	25.4 (1)	16.5-20.0	6.5-6.6
4.0 (5/32)	16.0 (5/8)	10.5-11.5	4.1-4.2				

Painted Rivets




Color painted build rivets

Commonly used instructions

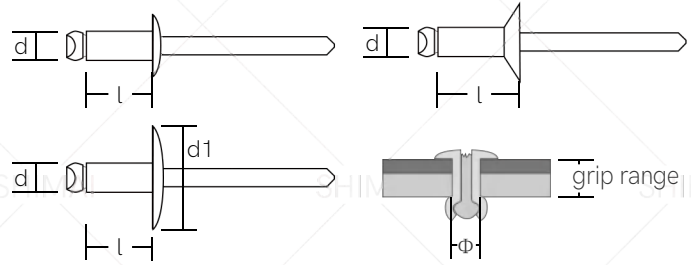

*d1: large flange is available by order

PAL Colors

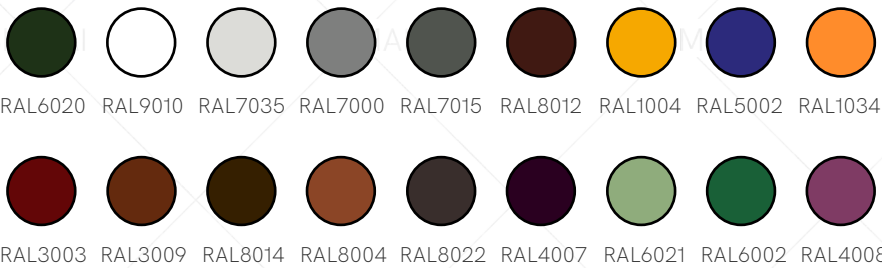

About

Option available to color aluminum and steel type rivets.

- Dome Head
- Countersunk Head
- Large Flange Head.

All kind of RAL color are available.

Specification (mm/inch)


Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
2.4 (3/32)	6.4 (1/4)	2.5-4.0	2.5-2.6	4.0 (5/32)	19.0 (3/4)	11.5-14.0	4.1-4.2
2.4 (3/32)	8.0 (5/16)	4.0-5.5	2.5-2.6	4.0 (5/32)	22.0 (7/8)	14.0-17.0	4.1-4.2
2.4 (3/32)	10.0 (3/8)	5.5-7.5	2.5-2.6	4.8 (3/16)	8.0 (5/16)	1.5-3.5	4.9-5.0
3.2 (1/8)	6.4 (1/4)	1.0-3.0	3.3-3.4	4.8 (3/16)	10.0 (3/8)	3.5-5.5	4.9-5.0
3.2 (1/8)	8.0 (5/16)	3.0-5.0	3.3-3.4	4.8 (3/16)	11.4 (7/16)	5.5-7.0	4.9-5.0
3.2 (1/8)	10.0 (3/8)	5.0-6.5	3.3-3.4	4.8 (3/16)	12.7 (1/2)	7.0-8.0	4.9-5.0
3.2 (1/8)	11.4 (7/16)	6.5-8.0	3.3-3.4	4.8 (3/16)	14.5 (9/16)	8.0-9.5	4.9-5.0
3.2 (1/8)	12.7 (1/2)	8.0-9.0	3.3-3.4	4.8 (3/16)	16.0 (5/8)	9.5-11.0	4.9-5.0
3.2 (1/8)	14.5 (9/16)	9.0-10.5	3.3-3.4	4.8 (3/16)	19.0 (3/4)	11.0-14.0	4.9-5.0
3.2 (1/8)	16.0 (5/8)	10.5-12.0	3.3-3.4	4.8 (3/16)	22.0 (7/8)	14.0-17.0	4.9-5.0
3.2 (1/8)	19.0 (3/4)	12.0-14.5	3.3-3.4	4.8 (3/16)	25.4 (1)	17.0-20.0	4.9-5.0
3.2 (1/8)	22.0 (7/8)	14.5-17.5	3.3-3.4	6.4 (1/4)	10.0 (3/8)	2.5-4.5	6.5-6.6
4.0 (5/32)	6.4 (1/4)	1.0-2.5	4.1-4.2	6.4 (1/4)	12.7 (1/2)	6.0-7.0	6.5-6.6
4.0 (5/32)	8.0 (5/16)	2.5-4.0	4.1-4.2	6.4 (1/4)	14.5 (9/16)	7.0-8.5	6.5-6.6
4.0 (5/32)	10.0 (3/8)	4.0-6.0	4.1-4.2	6.4 (1/4)	16.0 (5/8)	9.0-10.5	6.5-6.6
4.0 (5/32)	11.4 (7/16)	6.0-7.5	4.1-4.2	6.4 (1/4)	19.0 (3/4)	10.5-13.5	6.5-6.6
4.0 (5/32)	12.7 (1/2)	7.5-8.5	4.1-4.2	6.4 (1/4)	22.0 (7/8)	13.5-16.5	6.5-6.6
4.0 (5/32)	14.5 (9/16)	8.5-10.0	4.1-4.2	6.4 (1/4)	25.4 (1)	16.5-20.0	6.5-6.6
4.0 (5/32)	16.0 (5/8)	10.5-11.5	4.1-4.2				

Sealed Blind Rivet



Aluminum Copper Stainless steel

Commonly used instructions

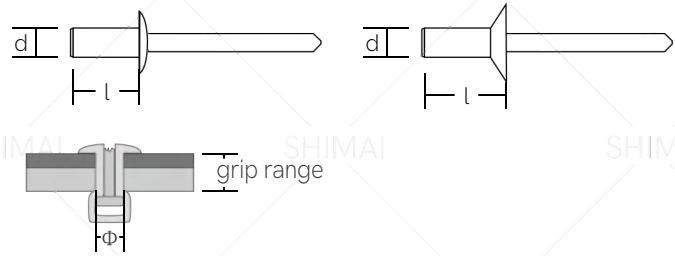

Material

aluminum alloy (body) + steel / Stainless steel (mandrel)
 copper (body) + steel / Stainless steel (mandrel)
 Stainless steel (body) + Stainless steel (mandrel)

Applications

Coach work
 Containers
 Air Conditioning
 Ship building industry

Specification (mm/inch) aluminum alloy / copper body

Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
3.2 (1/8)	6.5 (1/4)	0.5-2.0	3.3-3.4	4.8 (3/16)	8.5 (5/16)	0.5-3.5	4.9-5.0
3.2 (1/8)	8.0 (5/16)	2.0-3.5	3.3-3.4	4.8 (3/16)	9.5 (3/8)	3.5-5.0	4.9-5.0
3.2 (1/8)	9.5 (3/8)	3.5-5.0	3.3-3.4	4.8 (3/16)	11.0 (7/16)	5.0-6.0	4.9-5.0
3.2 (1/8)	11.0 (7/16)	5.0-6.5	3.3-3.4	4.8 (3/16)	12.5 (1/2)	6.5-8.0	4.9-5.0
3.2 (1/8)	12.5 (1/2)	6.5-8.0	3.3-3.4	4.8 (3/16)	14.5 (9/16)	8.0-9.5	4.9-5.0
4.0 (5/32)	8.0 (5/16)	0.5-3.0	4.1-4.2	4.8 (3/16)	16.0 (5/8)	9.5-11.0	4.9-5.0
4.0 (5/32)	9.5 (3/8)	3.5-5.0	4.1-4.2	4.8 (3/16)	18.0 (11/16)	11.0-13.0	4.9-5.0
4.0 (5/32)	11.0 (7/16)	5.0-6.0	4.1-4.2	4.8 (3/16)	21.0(13/16)	13.0-16.0	4.9-5.0
4.0 (5/32)	12.5 (1/2)	6.5-8.0	4.1-4.2	4.8 (3/16)	25.0 (1)	16.0-20.0	4.9-5.0
4.0 (5/32)	14.5 (9/16)	8.0-10.0	4.1-4.2				

Specification (mm/inch) Stainless steel body

Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
3.2 (1/8)	6.0 (1/4)	0.5-1.5	3.3-3.4	4.0 (5/32)	12.0 (15/32)	5.0-6.5	4.1-4.2
3.2 (1/8)	8.0 (5/16)	1.5-3.0	3.3-3.4	4.0 (5/32)	14.0 (9/16)	6.5-8.0	4.1-4.2
3.2 (1/8)	10.0 (3/8)	3.0-5.0	3.3-3.4	4.0 (5/32)	16.0 (5/8)	8.0-11.0	4.1-4.2
3.2 (1/8)	12.0 (15/32)	5.0-6.5	3.3-3.4	4.8 (3/16)	8.0 (5/16)	0.5-3.0	4.9-5.0
3.2 (1/8)	14.0 (9/16)	6.5-8.0	3.3-3.4	4.8 (3/16)	10.0 (3/8)	3.0-5.0	4.9-5.0
4.0 (5/32)	6.0 (1/4)	0.5-1.5	4.1-4.2	4.8 (3/16)	12.0 (15/32)	5.0-6.5	4.9-5.0
4.0 (5/32)	8.0 (5/16)	1.5-3.0	4.1-4.2	4.8 (3/16)	16.0 (5/8)	6.5-9.0	4.9-5.0
4.0 (5/32)	10.0 (3/8)	3.0-5.0	4.1-4.2	4.8 (3/16)	20.0 (13/16)	9.0-12.0	4.9-5.0

Multi-Grip Blind Rivet




Steel



Aluminum

Commonly used instructions

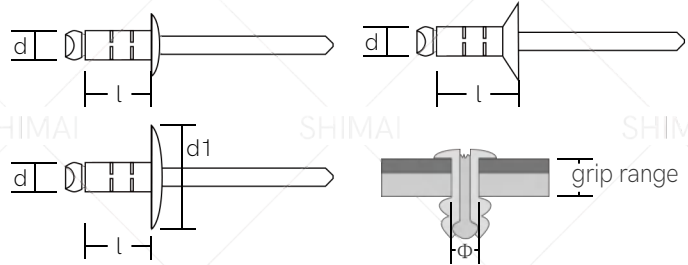

*d1: large flange is available by order

Material

- aluminum alloy (body) + steel (mandrel)
- steel (body) + steel (mandrel)
- Stainless steel (body) + Stainless steel (mandrel)

Applications

- Plastics
- Automotive
- Furniture industry

Specification (mm/inch) Steel / Stainless steel body

Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
3.2 (1/8)	11.0 (7/16)	1.0-6.0	3.3-3.4	4.8 (3/16)	11.0 (7/16)	1.5-6.3	4.9-5.0
4.0 (5/32)	13.0 (1/2)	2.0-8.0	4.1-4.2	4.8 (3/16)	14.0 (9/16)	1.5-9.0	4.9-5.0
4.8 (3/16)	10.0 (3/8)	1.5-5.1	4.9-5.0	4.8 (3/16)	17.5 (11/16)	6.3-12.7	4.9-5.0

Specification (mm/inch) Aluminum alloy body

Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
3.2 (1/8)	8.0 (5/16)	0.8-4.8	3.3-3.4	4.0 (5/32)	13.0 (33/64)	5.0-9.5	4.1-4.2
3.2 (1/8)	9.5 (3/8)	1.2-6.3	3.3-3.4	4.0 (5/32)	16.5 (21/32)	8.0-12.7	4.1-4.2
3.2 (1/8)	11.0 (7/16)	4.0-7.9	3.3-3.4	4.8 (3/16)	11.0 (7/16)	1.6-6.3	4.9-5.0
3.2 (1/8)	13.5 (17/32)	5.5-9.5	3.3-3.4	4.8 (3/16)	15.5 (5/8)	4.8-11.1	4.9-5.0
4.0 (5/32)	8.0 (5/16)	0.8-4.7	4.1-4.2	4.8 (3/16)	17.0 (11/16)	6.5-12.7	4.9-5.0
4.0 (5/32)	9.8 (25/64)	1.2-6.3	4.1-4.2	4.8 (3/16)	25.0 (1)	14.5-19.8	4.9-5.0

High Strength Blind Rivet




Steel



Stainless steel

Commonly used instructions



Material

steel (body) + steel (mandrel)

Stainless steel (body) + Stainless steel (mandrel)

Applications

Automotive industry / Truck building / Construction work / Coach work

Specification (mm/inch)

Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
3.2 (1/8)	7.0 (9/32)	1.0-3.0	3.3-3.4	4.0 (5/32)	12.0 (15/32)	5.0-7.0	4.1-4.2
3.2 (1/8)	9.0 (11/32)	3.0-5.0	3.3-3.4	4.0 (5/32)	14.0 (35/64)	7.0-9.0	4.1-4.2
3.2 (1/8)	11.0 (7/16)	5.0-7.0	3.3-3.4	4.8 (3/16)	9.5 (3/8)	1.5-3.5	4.9-5.0
4.0 (5/32)	8.0 (5/16)	1.0-3.0	4.1-4.2	4.8 (3/16)	12.0 (15/32)	3.5-6.0	4.9-5.0
4.0 (5/32)	10.0 (3/8)	3.0-5.0	4.1-4.2	4.8 (3/16)	14.5 (9/16)	6.0-8.5	4.9-5.0

High Strength Blind Rivet




steel



aluminum alloy

Commonly used instructions

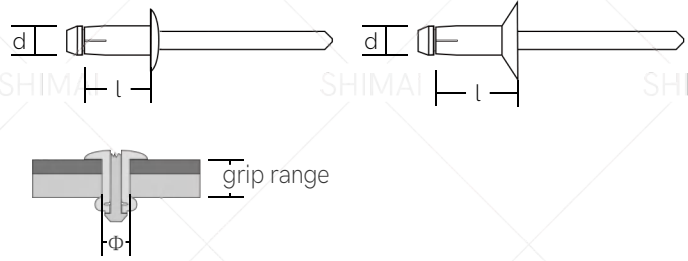

Material

aluminum alloy (body) + aluminum alloy (mandrel)

steel (body) + steel (mandrel)

Stainless steel (body) + Stainless steel (mandrel)

Applications

Automotive industry / Truck building / Containers / Construction work / Coach work

Specification (mm/inch)

Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
6.4 (1/4)	9.0 (11/32)	1.5-3.5	6.7-6.9	6.4 (1/4)	16.5 (5/8)	8.8-10.8	6.7-6.9
6.4 (1/4)	10.5 (13/32)	2.8-4.8	6.7-6.9	6.4 (1/4)	18.5 (3/4)	10.8-12.8	6.7-6.9
6.4 (1/4)	11.1 (2/16)	3.4-5.4	6.7-6.9	6.4 (1/4)	20.5 (13/16)	12.8-14.8	6.7-6.9
6.4 (1/4)	12.5 (1/2)	4.8-6.8	6.7-6.9	6.4 (1/4)	22.5 (7/8)	14.8-16.8	6.7-6.9
6.4 (1/4)	14.5 (9/16)	6.8-8.8	6.7-6.9	6.4 (1/4)	24.5 (31/32)	16.8-18.8	6.7-6.9


Anlock Blind Rivet In-Bolt



Aluminum

Steel

Commonly used instructions

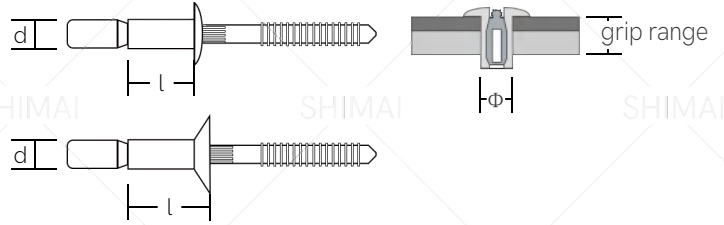

Material

Aluminum alloy (body) + Aluminum alloy (mandrel)

Steel (body) + Steel (mandrel)

Stainless steel (body) + Stainless steel (mandrel)

Applications

Automotive industry / Truck building / Containers / Construction work / Coach work

Specification (mm/inch)

Dia(d)	length(l)	Grip range	Φ
4.8 (3/16)	10.0 (3/8)	1.57-6.86	4.9-5.1
4.8 (3/16)	14.0 (9/16)	1.57-11.1	4.9-5.1
6.4 (1/4)	14.0 (9/16)	2.03-9.53	6.6-6.9
6.4 (1/4)	20.0 (13/16)	2.03-15.88	6.6-6.9


Anlock Blind Rivet Out-Bolt



Aluminum

Steel

Commonly used instructions

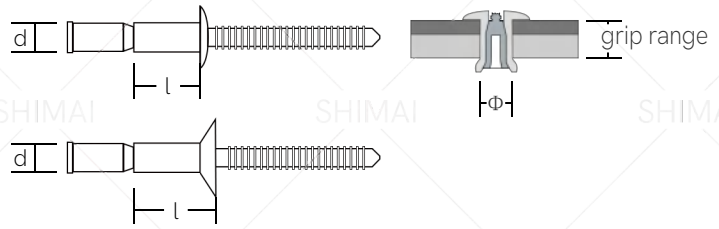

Material

Aluminum alloy (body) + Aluminum alloy (mandrel)

Steel (body) + Steel (mandrel)

Stainless steel (body) + Stainless steel (mandrel)

Applications

Automotive industry / Truck building / Containers / Construction work / Coach work


Specification (mm/inch)

Dia(d)	length(l)	Grip range	Φ
4.8 (3/16)	10.0 (3/8)	1.57-6.86	4.9-5.0
4.8 (3/16)	14.0 (9/16)	1.57-11.1	4.9-5.0
6.4 (1/4)	14.0 (9/16)	2.03-9.53	6.5-6.6
6.4 (1/4)	20.0 (13/16)	2.03-15.88	6.5-6.6

Bulb Tite Blind Rivet



Commonly used instructions

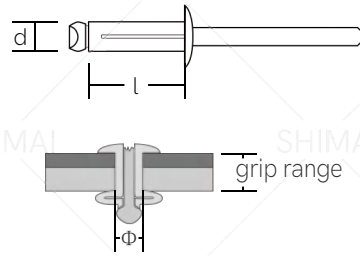

Material

Aluminum alloy (body) + Aluminum alloy (mandrel)
steel (body) + steel (mandrel)

Applications

Soft material such as wood / Insulation / Plastic / Plaster boards


Specification (mm/inch)

Dia(d)	length(l)	Grip range	Φ
4.0 (5/32)	13.6 (17/32)	1.0-3.0	4.2-4.5
4.0 (5/32)	18.8 (3/4)	1.0-7.0	4.2-4.5
4.0 (5/32)	20.5 (13/16)	1.0-8.5	4.2-4.5
4.0 (5/32)	25.2 (1)	5.0-12.0	4.2-4.5
4.8 (3/16)	16.0 (5/8)	1.0-4.0	5.0-5.25
4.8 (3/16)	21.0 (13/16)	1.0-9.0	5.0-5.25
4.8 (3/16)	24.0 (15/16)	4.0-12.0	5.0-5.25

Structural Bulb Tite Blind Rivet



Commonly used instructions

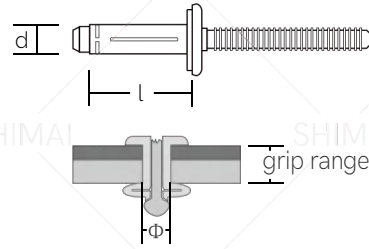

Material

Aluminum alloy (body) + Aluminum alloy (mandrel)
steel (body) + steel (mandrel)

Applications

Construction / Domestic application

Specification (mm/inch)


Dia(d)	length(l)	Grip range	Φ
7.7 (5/16)	27.7 (1-3/32)	1.1-9.5	7.8-8.2
7.7 (5/16)	34 (1-5/16)	6.35-15.87	7.8-8.2

Peel Blind Rivet



aluminum alloy + steel

Commonly used instructions



Material

aluminum alloy (body) + steel (mandrel)

Applications

Plasterboard / Furniture / Plastic-framed window properties

Specification (mm/inch)


Dia(d)	length(l)	Grip range	Φ	Dia(d)	length(l)	Grip range	Φ
3.2 (1/8)	6.0 (1/4)	1.0-2.5	3.3-3.4	4.8 (3/16)	10.0 (3/8)	2.5-5.0	5.0
3.2 (1/8)	8.0 (5/16)	2.5-4.5	3.3-3.4	4.8 (3/16)	12.0 (15/32)	4.5-7.0	5.0
3.2 (1/8)	10.0 (3/8)	4.5-6.5	3.3-3.4	4.8 (3/16)	14.0 (9/16)	6.5-9.0	5.0
3.2 (1/8)	12.0 (15/32)	6.5-8.0	3.3-3.4	4.8 (3/16)	16.0 (5/8)	8.5-10.0	5.0
3.2 (1/8)	16.0 (5/8)	8.0-11.5	3.3-3.4	4.8 (3/16)	18.0 (11/16)	9.5-12.0	5.0
3.2 (1/8)	20.0 (13/16)	11.5-15.0	3.3-3.4	4.8 (3/16)	20.0 (13/16)	11.5-14.0	5.0
4.0 (5/32)	8.0 (5/16)	1.0-4.0	4.2	4.8 (3/16)	25 (1)	13.5-19.0	5.0
4.0 (5/32)	10.0 (3/8)	4.0-5.5	4.2	4.8 (3/16)	30.0 (1-3/16)	19.0-23.0	5.0
4.0 (5/32)	12.0 (15/32)	5.5-7.5	4.2	4.8 (3/16)	35.0 (1-3/8)	23.0-28.0	5.0
4.0 (5/32)	16.0 (5/8)	7.5-11.0	4.2	4.8 (3/16)	40.0 (1-9/16)	28.0-33.0	5.0
4.0 (5/32)	20.0 (13/16)	11.0-15.0	4.2				
4.0 (5/32)	25 (1)	15.0-19.0	4.2				

Drive Rivet



Aluminum / Stainless Steel

Commonly used instructions



Applications

Swimming pool liners / Roofing / Building / Connection: stone, brick or concret.....tc.

Specification (mm/inch)

Dia(d)	length(l)	Grip range	Φ
4.8 (3/16)	10.0 (3/8)	3.7-6.2	4.9-5.0
4.8 (3/16)	16.0 (5/8)	9.7-31.2	4.9-5.0
4.8 (3/16)	20.0 (13/16)	13.7-16.2	4.9-5.0
4.8 (3/16)	25.0 (1)	18.7-21.2	4.9-5.0
4.8 (3/16)	30.0 (1-3/16)	23.7-26.2	4.9-5.0
4.8 (3/16)	35.0 (1-3/8)	28.7-31.2	4.9-5.0
4.8 (3/16)	40.0 (1-9/16)	33.7-36.2	4.9-5.0

Packaging & Shipping



Color box



White box



Brown box

About delivery

For build rivet orders with a total order of less than 1,000,000pcs, if there are no special circumstances, we will ship within 20 days after ordering

Packaging details

1. We have several sizes of packing dimensions, can be 20kg or 25kg per carton.
2. For large orders, we can design specific sizes of boxes and cartons.
3. Normal Packing: 1000pcs/500pcs/250pcs per small box. then small boxes into cartons.
4. Can provide special packings as middle east clients requests.

Company Profile

Our company "Shimai" is an advanced manufacturer with import and export rights in fastener business. We introduces Taiwan's advanced production equipment and superb technology, then has a series of advanced professional screw production lines. Our main products are screws, rivets, nails, anchor, bolts, nuts, Circlips, Washers, Studs, bits, pins and hardware tools. With more than 10,000 tons of annual production, we serve various industries and fields at home and abroad. At the same time, our company is committed to the development of stainless steel screws, and more high-precision, high-quality screws and established long-term good business relations with Europe, America, Southeast Asia, Middle East and other countries customers.

With the principle of "excellence quality first, integrity management, customer first", our company is in strict management, high-quality production, high-precision inspection and high standard service.

We has passed the EU quality management system certification-CE and get SGS certificate, So quality guaranteed. With over 10 years experience of exporting, we have the ability to meet customer's needs and wants and we are making great efforts to make win-win situation. Sincerely welcome you to join us!

Company Advantage

1) Best Service :

We provide 24 hours online service for dealing with customer's inquiries and solve customer's problems at the first time.

2) Professional Team :

Our team has more than 20 years of experience. All products are developed and designed by ourselves.

3) Technical Section :

Technical support is provided by professional technicians to ensure that the drawings are precise and accurate.

4) Factory direct sale :

You can get direct factory price from us.

Product Advantages

1) High Quality

2) Timely Delivery Guaranteed

3) Model Customization

4) Technical Controlling

5) Precision Machining

6) Complete model



Shimai Industrial Co., Limited

Wangwenzhuang Industrial Park, Xiqing District, Tianjin, China

Tangshan Shimai Imp & Exp Trading Co.,Ltd

No.118, Bldg.9, Tongda Building Materials Exhibition City, Fengnan Development Area, Tangshan, Hebei, China

Tel/Fax: 0086 315 8117672

Mobile/Whatsapp/Wechat: 0086 13012299116

Mail: suli@shimai-hardware.com

www.shimaifastener.com